

## Gas Leak Detector

### JL269 Portable Gas Leak Detector

#### FEATURES

- Fast response and resume
- Flexible gooseneck and adjustable display unit
- Battery low voltage alert
- LED or LCD display (optional)
- Sensor fault detection
- Automatic zero calibration
- Audible alarm signal with variable frequency


#### APPLICATION

Daily inspection and maintenance of the gas pipelines by the gas companies



JL269 (LCD) is a industrial type portable gas leak detector with high sensitivity and wide detecting range, it can detect about 10 types of combustibile gases. It has small size, simple operation, and easy to carry, with a lengthened flexible probe, it also has good resistance to shock. It can be used to detect methane, natural gas, propane, LPG, Hydrogen and other combustibile gases and can help you to find the gas leaking sources easily.

#### APPEARANCE

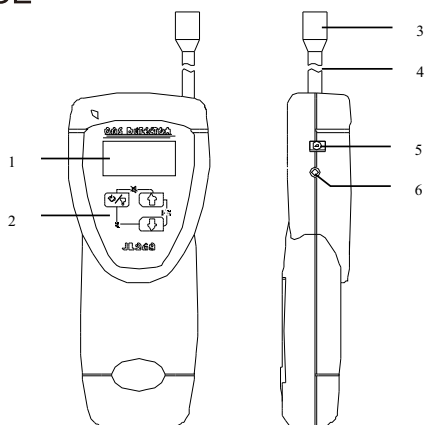

- |                    |                    |
|--------------------|--------------------|
| 1. LCD screen      | 4. Gooseneck       |
| 2. Button          | 5. Charge terminal |
| 3. Sensor assembly | 6. Earphone input  |

#### SPECIFICATIONS

Measuring gas	Natural gas (CH <sub>4</sub> ), LPG (C <sub>3</sub> H <sub>8</sub> ), H <sub>2</sub>	Operating temperature	-10 ~ 55°C
Measuring gas range	CH <sub>4</sub> : 0-30000ppm C <sub>3</sub> H <sub>8</sub> : 0-20000ppm H <sub>2</sub> : 10000ppm	Operating humidity	< 93%RH (no condensation)
		Operating power	DC3.6V 2100mAh rechargeable Ni-MH battery
Sensitivity	Better than 50ppm	Alarm method	Visual and audible signal
Response time	T <sub>90</sub> < 5s	Sensor lifespan	2 years
Measuring type	Diffuse naturally	Dimension and weight	180*mm72mm*36mm, about 300g
Working time	More than 8 hours (no alarming status) continuously		

**Welcome to Hanwei !**