Battery-operated CO Alarm

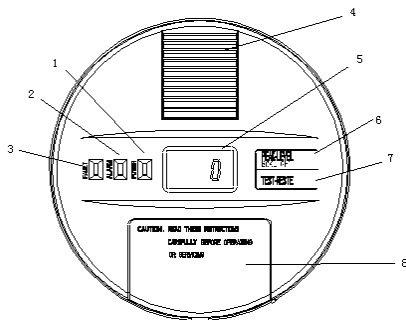Ceilling

Wall-hung

Back-support

EN 50291

KAD

FEATURES

- EN50291 Approved by BSI
- High quality electrochemical sensor
- Ceiling mounted or back support
- LCD display

APPLICATION

The KAD CO alarm provides you and your family with a loud warning signal against the dangers of deadly carbon monoxide and provides continuous monitoring of CO levels.It is easy to use and is ideal for use in all living areas.

FUNCTION

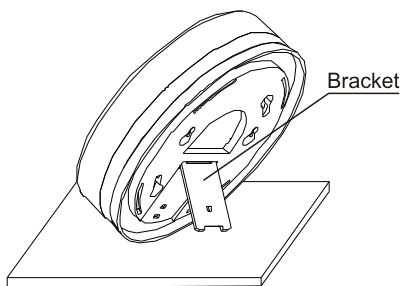|	
1.Power indication LED	5.LCD display window
2.Fault indication LED	6.Backlight /Peak level check button
3.Alarm indication LED	7.Test/Reset button
4.Sound window	8.Battery cover

BATTERY INSTALLATION

First, please turn off the battery cover according to the orient on the above drawing. And then, install the batteries inside according to the indication.

Note: Please replace the used batteries with 1.5V same new batteries. Different type or low quality battery will reduce life of the detector.
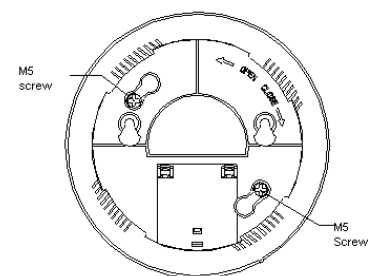
INSTALLATION METHOD

Tap top:

Bracket

Wall mounted:
Dimensions of the fixing holes

Ceiling hung:

M5 screw

M5 Screw

SPECIFICATIONS

Measuring gas	Carbon Monoxide	Alarming level	Follow EN50291 standard
Working voltage	DC3V	Working Environment	Temperature: -10℃ ~ 50℃ Humidity: <95%RH
Sensor type	Electrochemical sensor		
Sensor life	>7 years	Alarm sound	≥85dB(1m)

Welcome to Hanwei !