

Inline Detonation Flame Arrester

: 1002-0013-00

EC design test certificate no.

: IBExU 10 ATEX 2072 X

Standard gap (MESG)

: < 0,50 mm

Explosion group

: Ex G IIC

Operating direction




: Bidirektional / Bi-directional

Thread connection

: G1/4" innen/internal ISO228-1

Weight

: ~ 0,68 kg

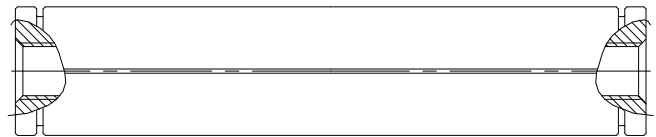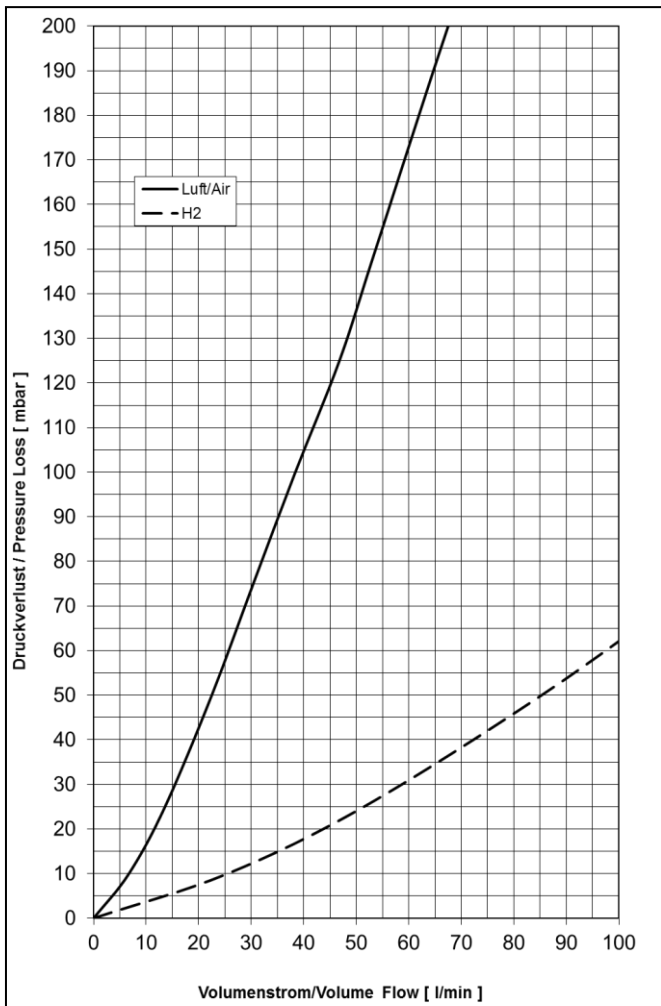

Material

Housing

V4A/AISI 316 range

Flame Arrester Element

1.4301/AISI304, 1.4571/AISI 316Ti

O-Ring

FPM (Viton)

Operating Data

Type : DET 4

Absolute pressure : $\leq 1,2$ bar

Temperature : $\leq 60,0$ °C

Nominal pipe size : \leq DN15

Pressure loss

Medium Air

$p_0 = 1013$ mbar, $T_0 = 273K$, density = $1,293$ kg/m³